


Analogue Insulation Tester



Technical Data

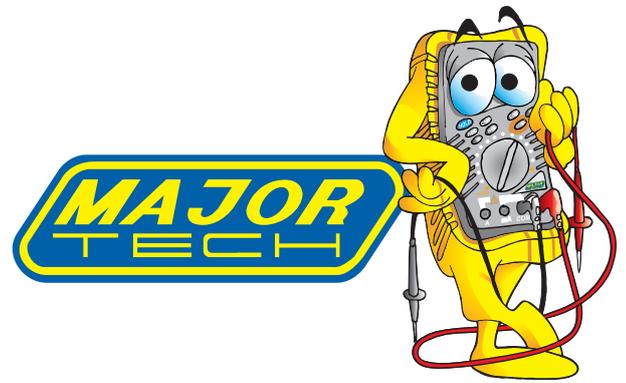

K3132

The K3132 is a highly compact and easy to use Insulation and Continuity Tester. Designed to have an IP protection rating of IP54 and is ideally suited to more arduous environments. The instrument offers three insulation test ranges: 250V, 500V and 1000V, a 3Ω continuity range and a 500Ω resistance range. This meter is not only equipped with a “Live Circuit Warning” but also displays the actual AC voltage measurements of the mains supply.

Features Include:

- Three test ranges 250V-500V-1000V
- Auto null function
- AC voltage measurements to 600V
- Live circuit warning
- Lock down Test Button for continuous use
- 1mA output current on insulation test
- 200mA short circuit on continuity range

General Specifications

Typical number of measurements

Insulation Resistance	
Ranges	: 1MΩ at 1000V Range Approx, 1 400 times min. 0.5MΩ at 500V Range Approx, 3 500 times min. 0.25MΩ at 250V Range Approx, 5 500 times min.
Continuity Test	
(Resistance Test) Ranges	: 1Ω at 3Ω Range Approx, 1500 times min.
Applicable Standards	: IEC61010-1 Overvoltage CAT. III 300V Pollution Degree 2 IEC61010-2-31 Safety requirements for hand-held probe assemblies IEC61557-1/2/4 Measuring equipment for low voltage distribution systems IEC61326-1 EMC IEC60529 (IP54) Dust and drip proof
Operating Temperature and Humidity	: 0 to 40°C, relative humidity up to 85%
Storage Temperature and Humidity	: -10°C to -50°C, relative humidity up to 75%
Insulation Resistance	: More than 50MΩ at 1000V DC between electrical circuit and housing case
Withstand Voltage	: 3700V AC for one minute between electrical circuit and housing case
Overload Protection	
Insulation Resistance	
Ranges	: 1000V Range 1200V (DC+AC p-p) for 10 seconds 500V Range 600V (DC+AC p-p) for 10 seconds 250V Range 300V (DC+AC p-p) for 10 seconds
Continuity Ranges	: 3Ω/500Ω Range 280V (DC+AC p-p) for 10 seconds
AC Voltage Warning	: 1200V (DC+AC p-p) for 10 seconds
Dimensions	: 106(L) X 160(W) X 72(H) mm approx.
Weight	: 560g approx. (including battery)
Power source	: 6X1.5V battery type R6P, 1.5V AA or equivalent\)
Accessories	: Test probe MODEL 7122 x1 set Pouch for test probe x1 Shoulder Strap x1 R6P batteries x6 Spare fuse F500mA/600V x1 Instruction manual x1



Measuring Ranges and Accuracy (at 23 ± 5°C, relative humidity 45-75%)

Measurement	Normal Output Voltage	250V	500V	1000V
Insulation Resistance Range	Measuring Ranges	0-100MΩ	0-200MΩ	0-400MΩ
	Open Circuit Voltage	Rated test voltage +20%, -0%		
	Normal Current	1mA DC +20%, -0%		
	Short Circuit Current	About 1.3mA DC		
	Accuracy Guaranteed Range	0.1-10MΩ	0.2-20MΩ	0.4-40MΩ
	Accuracy	± 5% rdg at Accuracy guaranteed ranges		
		± 0.7% at scale length at ranges other than above ranges		
Measurement	Ranges	3Ω	500Ω	
Continuity Test	Open Circuit Voltage	About 4.1V DC		
	Measuring Current	Greater than 200mA		
	Accuracy	1.5% of scale length at other measuring ranges		
Measurement	Ranges	Measuring ranges to keep operating error	Maximum percentage operating error	
Insulation Resistance Ranges	250V/100MΩ	0.1MΩ - 10MΩ	± 30%	
	500V/200MΩ	0.2MΩ - 20MΩ		
	1000V/400MΩ	0.4MΩ - 40MΩ		
Continuity Test	3Ω	0.2Ω - 3Ω		

AC Voltage Warning	
Warning Range	0 - 600V
Accuracy	± 5% of scale length
Input Impedance	1.2MΩ

Ordering Information

HEAD OFFICE

Cnr Rover and Jaguar Roads, Rustivia Ext 3, Elandsfontein
P.O. Box 888, Isando 1600, South Africa
Telephone: +27 11 822 1551
Sales Fax: +27 11 822 2806
Admin Fax: +27 11 822 1411
e-mail: sales@major-tech.com
National Tel: 08 61 MAJORT / 08 61 62 5678

BRANCHES - DURBAN

6A Pastel Park, Wareing Road, Pinetown
P.O. Box 15550, Ashwood 3605
Telephone: +27 31 701 5830
Sales Fax: +27 31 701 6986

BRANCHES - CAPE TOWN

109 Kyalami Drive, Killarney Gardens
P.O. Box 60122, Tabelview 7439
Telephone: +27 21 556 3091
Sales Fax: +27 21 556 3093

BRANCHES - PORT ELIZABETH

175 Kempston Road, Sidwell
P.O. Box 22499, Port Elizabeth 6000
Telephone: +27 41 453 3818
Sales Fax: +27 86 633 9809

