



# VETi


Don't be ordinary ... Switch on Style!



HHB10NW

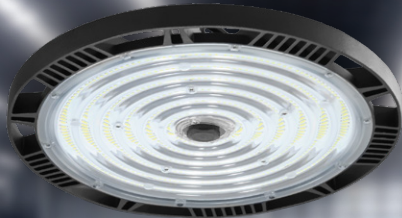

HHB15NW

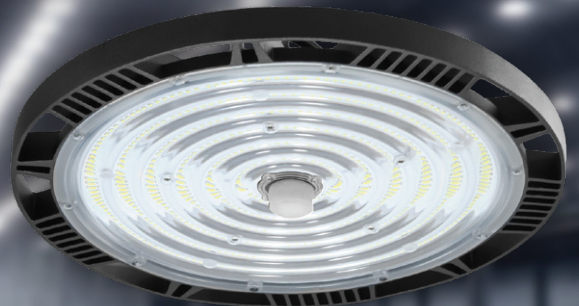

HHB20NW


## High Lumen High-Bays

The HHB Series is a range of high-performance, professional-grade UFO LED High Bays engineered for demanding industrial and commercial environments. Featuring a modern design with an isolated driver and constructed from high-quality materials, these luminaires deliver outstanding efficiency and reliability. Each model in the range is equipped with high-intensity SMD 3030 LEDs, delivering an exceptional luminous efficacy of 190lm/W. With lumen outputs of up to 57 000 lumens and a consistent 5000K neutral white colour temperature, the HHB Series provides bright, clear illumination with a wide 90° beam angle for uniform light distribution across large areas. Built for durability, the HHB Series features an IP65-rated enclosure for protection against dust and water ingress, making it ideal for warehouses, factories, workshops, and other harsh environments. The fixtures support a wide input voltage range of 85 to 277V AC and include a secure suspension hook for safe and easy ceiling installation. Designed for long-term performance, the HHB Series is supported by a 5-year warranty, offering both reliability and peace of mind.

### Specifications

- Standards: IEC 60598-1, IEC 60598-2-1, AS/NZS 60598-1, CISPR 15 AS/NZS 60598-2-1
- Approvals: C-Tick, SAA, RCM, LOA
- Ingress Protection: IP65
- Voltage: 85 to 277V AC
- IP Rating: IK08
- Material: Heavy Duty Die- Cast Aluminum Housing + Polycarbonate Lens
- High quality SMD 3030 LED Chips
- Beam Angle: 90°
- Secure Hook and Chain for Safe Ceiling Suspension
- Power Factor >0.95
- CRI: >70
- Colour Temperature: 5000K Neutral White
- Optional Microwave Sensor Available (HMS360)
- HMS360 Uses a quick connect system for easy installation
- Limited Warranty: 5 Years

### Features



High Lumen Efficiency 190lm/w



Die-cast Aluminium Body designed for effective heat dissipation



Removable Cap for Simple Sensor Integration (HMS360) IP65



Secure Galvanised Chain & Hook for Safe Ceiling Suspension

### Models

PART NUMBER	WATTAGE	LUMEN/WATT	TOTAL LUMEN	SURGE PROTECTION	INSTALLATION HEIGHT	SIZE	WEIGHT	CARTON PACK
HHB10NW	100W	190lm/W	19000lm	4kV (L-PE); 6kV (L-N)	6-8m	Ø240 x 93mm	1.60kg	1
HHB15NW	150W	190lm/W	28500lm	4kV (L-PE); 6kV (L-N)	8-12m	Ø308 x 93mm	2.60kg	1
HHB20NW	200W	190lm/W	38000lm	4kV (L-PE); 6kV (L-N)	12-15m	Ø355 x 93mm	3.10kg	1
HHB30NW	300W	190lm/W	57000lm	4kV (L-PE); 6kV (L-N)	16-18m	Ø400 x 93mm	4.75kg	1

### Accessories

#### Models

PART NUMBER	DESCRIPTION	DETECTION DISTANCE	DETECTION AREA	DETECTION BEAM ANGLE	MOTION BRIGHTNESS	HOLD TIME	STAND-BY BRIGHTNESS	STAND-BY TIME
HMS360	360° Microwave Sensor	15m Max.	360°	95°	100%	10 min	30%	Continuous
HRC1	Remote Control for HMS360	5-15m	-	-	Configurable	Configurable	Configurable	Configurable

086 162 5678

sales@veti.co.za

www.veti.co.za

# VETi®

Don't be ordinary ... *Switch on Style!*



EHB10NW



EHB15NW



EHB20NW


## Ultra Slim High-Bays

The EHB Series are ultra-slim UFO LED High-bays with a modern design, featuring a die-cast aluminium body that ensures effective heat dissipation. These high-performance light fittings provide a bright output of up to 48 000 lumens, powered by energy-efficient SMD 2835 LED chips and a reliable DOB (Driver on Board) system. With a colour temperature of 5000K and a 90° beam angle, this range offers efficient and even light distribution, making it ideal for industrial and commercial applications. The fixtures operate within a voltage range of 180-265V AC and have a luminous efficacy of 120lm/W, ensuring optimal energy performance. The EHB Range also boasts a power factor of >0.9 and an IP65 rating for dust and water resistance, making it suitable for harsh environments. The EHB Range is easy to install with a suspension hook and a chain included for convenient mounting. This robust lighting solution is built to last offering peace of mind for long-term use.

### Specifications

- Standards: IEC 60598-1, IEC 60598-2-1, AS/NZS 60598.1, AS/NZS 60598.2.1, CISPR 15, SANS 475
- Approvals: C-Tick, SAA, RCM, LOA
- Ingress Protection: IP65
- Voltage: 180 to 265V AC
- IP Rating: IK08
- Life Hours: 30 000 Hrs
- Material: Heavy Duty Die-Cast Aluminum + Polycarbonate Lens
- High Quality SMD 2835 LED Chips
- Beam Angle: 90°
- Secure Hook and Chain for Safe Ceiling Suspension
- Power Factor: >0.9
- CRI: >70
- Colour Temperature: 5000K Neutral White
- Limited Warranty: 2 Years

### Features



Ultra Slim Modern Design



Die-cast Aluminium Body designed for effective heat dissipation



Concentric Lens Design for Efficient, Even & extremely Bright Light Distribution



Secure Hook for Safe Ceiling Suspension

### Models

PART NUMBER	WATTAGE	LUMEN/WATT	TOTAL LUMEN	SURGE PROTECTION	INSTALLATION HEIGHT	SIZE	WEIGHT	CARTON PACK
EHB10NW	100W	120lm/W	12 000lm	4kV (L-PE,L-N)	5-6m	Ø302 x 34mm	1.35kg	1
EHB15NW	150W	120lm/W	18 000lm	4kV (L-PE,L-N)	7-9m	Ø332 x 34mm	1.55kg	1
EHB20NW	200W	120lm/W	24 000lm	4kV (L-PE,L-N)	9-12m	Ø362 x 34mm	1.95kg	1
EHB30NW	300W	120lm/W	36 000lm	4kV (L-PE,L-N)	12-15m	Ø422 x 34mm	3.02kg	1
EHB40NW	400W	120lm/W	48 000lm	4kV (L-PE,L-N)	16-18m	Ø452 x 34mm	3.86kg	1

086 162 5678

sales@veti.co.za

www.veti.co.za